


# rokfloor



**rokfloor**  
www.rokfloor.com

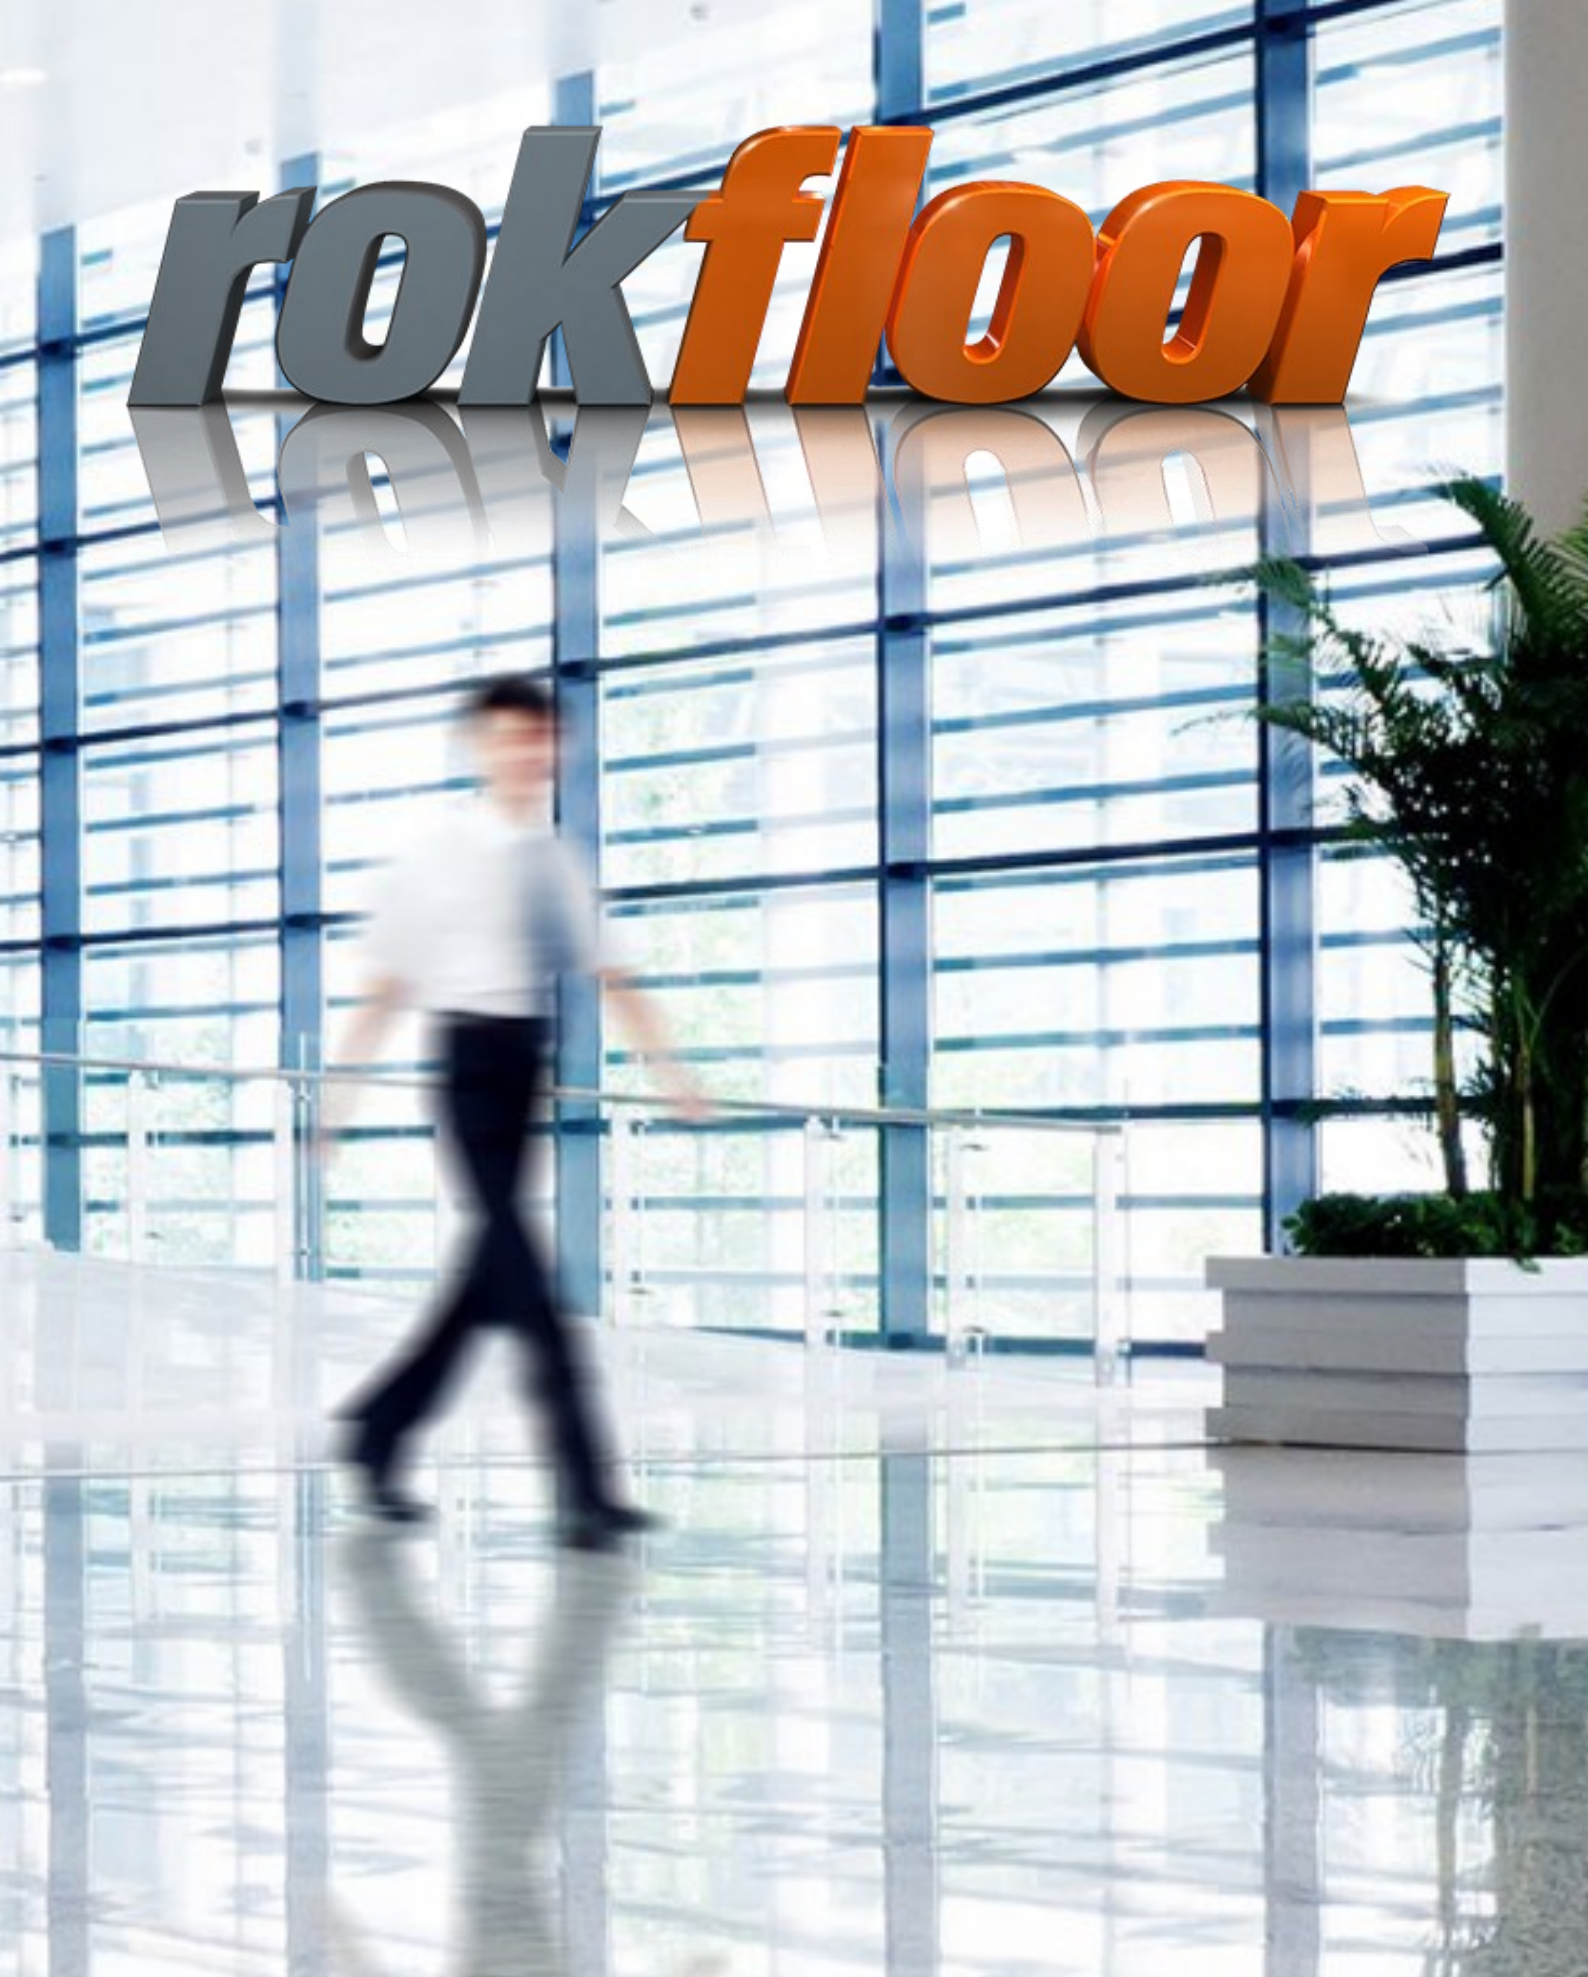

sales@rokfloor.com



<https://www.linkedin.com/company/rokfloor>



<https://www.facebook.com/rokfloor>

**Rokfloor Ltd** is dedicated to help restore and maximize the natural beauty of stone and hard flooring, such as Terrazzo, Granite and Marble.

This is achieved through a **Diamond Polishing process**, which delivers an amazing finish without using chemicals, therefore avoiding damage to the environment.

By using **Diamond Polishing Pads** with floor cleaning machines, your floor will acquire an even shine, will be easier to maintain and, as the finish develops, the floor surface will be more resistant to stains and ingrained dirt, thus reducing cleaning costs!

## KEY FEATURES of the Diamond Polishing Process

- ➔ Superior finish created naturally
- ➔ Environmentally friendly
- ➔ Easy to implement and maintain
- ➔ Cost effective

Recognised system – as used by Asda, Tesco and Sainsbury's



*It's very simple, quick and effective, both in cost and instant **IMPACT***



# HOW THE SYSTEM WORKS

## Selecting the pad

50 Grit is the most abrasive pad and should be used where a floor is worn or rough to the touch. If you start with 50 grit you must then continue the system through 120, 220, 400, etc., until you achieve the desired result. If your floor is not so rough to the touch you may start the process at a higher grit, e.g. 120 or 220. For instance, average supermarket floor uses 220, 400 and 800 grit, to achieve desired result.

## Rokfloor tips

- Before using on your main floor area, **Rokfloor** highly recommends testing in a *hidden* area to determine the required results.
- Never miss a grit as this would result in your floor not achieving the required result and it would also lose its shine quicker.
- The higher the grit, the smoother the floor and the possibility of less slip resistance. Please check and, if required, you must get a Slip Test Reading approved by your customer.



## PAD APPLICATION



Choose the correct machine.

### Requirements

- › Minimum 16" = 3 pads fitted to one drive plate
- › 32" / 36" = 6 pads fitted to two drive plates
- › Adjustable pad pressure on scrubber driers

## ATTACHING PADS

- Fit clean and dry red pads to the drive plate/s
- Attach 3 polishing segments equally to the pad drive/s of your scrubber drier or rotary
- Lubricate with water; apply medium head pressure with a minimum of seven passes at a reduced speed (compared to normal scrubbing speed) per pad selection.



# ONGOING MAINTENANCE

## Top-up of diamond polished areas

Every 4 – 8 weeks, for one day only fit the final diamond you finished on, e.g. 800 grit. Pass over the traffic areas scrubbing and drying. Detailed areas can be top-up as necessary with the floor rotary machine and water tank again passing over the area once only.


*NOTE: Warehouse entrances and other heavy traffic areas may require more frequent top-ups.*

## When to replace the diamond segments

The polishing diamonds are only in the pods of the segment.

- If the pods are worn down (*see diagram*) the segments need replacing.
- Whenever replacing segments, replace all the set at the same time. This is very important to achieve a consistent, even finish.

*NOTE: Never mix sets or use part worn segments with new segments.*

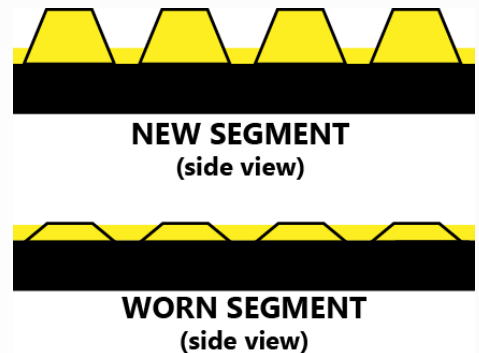

## After 12 months

After 12 months, depending on foot traffic, you may find that simply continuing with ongoing maintenance may not produce the desired results. At this time a refresh of the Diamond Polishing process may be required, using all grits, in order that the floor will be restored once again to its natural beauty.

*Disclaimer: Rokfloor Ltd accepts no responsibility for damage or injury caused by using the Diamond Pads and strongly recommends that all operators are fully trained in the Diamond Polishing process. Rokfloor also highly recommends that before using on your main floor area, test in a 'hidden' area to determine the required results.*